


Low Profile PCI 1-Port RS-232, RS-422, RS-485 Isolated Serial Interface

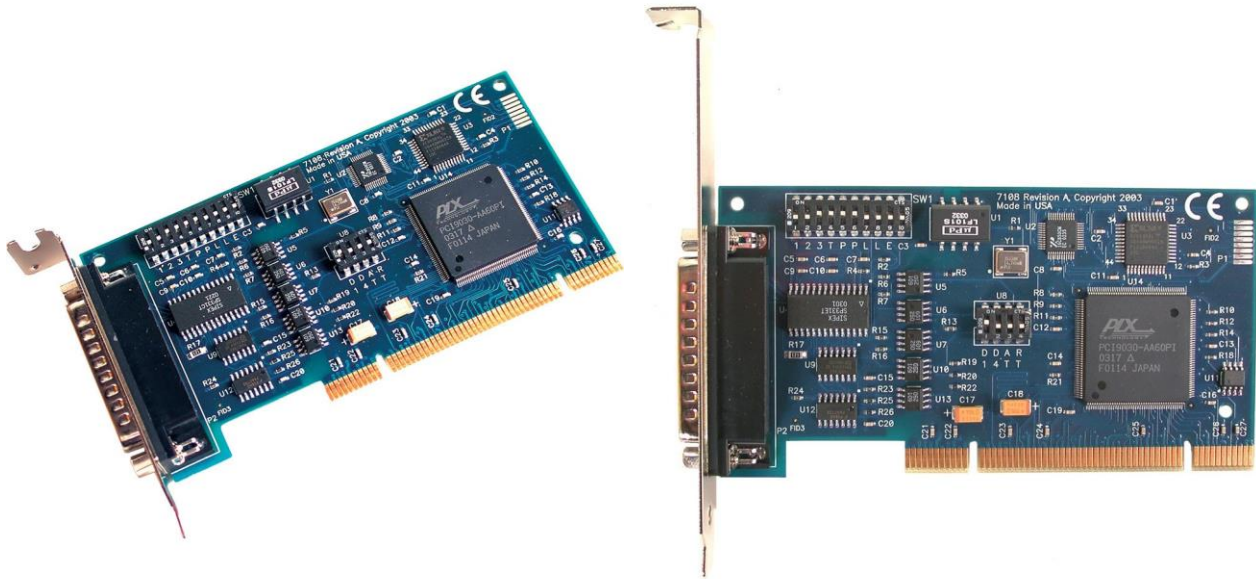

Part: 7108 **Model:** Ultra COMM+I.LPCI

tienda.logicbus.com.mx
logicbus.com

ventas@logicbus.com
sales@logicbus.com

México
+52 (33)-3854-5975

USA
+1 (619) 619-7350

Description

The 7108 Low Profile PCI serial interface provides one optically isolated serial port configurable for RS232, RS-422, or RS-485. The board is capable of data rates to 921.6K bps and automatically handles RS-485 transmitter enable/disable.

The 7108 utilizes a 16C850 UART to provide 128-byte Tx/Rx FIFOs for maximum reliability in data-intensive applications. The board is MD1 Low Profile and Universal Bus (3.3V and 5V) compatible and ordering options allow the choice of UARTs for custom baud rates and 9-bit protocols.

The Sealevel SeaCOM software driver and utilities make installation and operation easy using

Microsoft Windows or Linux operating systems.

The 7108 is compatible with any low profile PCI slot. If you have a standard size PCI slot, be sure to select the standard profile bracket.

Category: One Port

Additional information

| | |
|------------------------------|--|
| Communications Chip | 16C850 |
| Electrical Interface | RS-232, RS-422, RS-485 |
| Humidity Range | 10 – 90% Relative Humidity, Non-Condensing |
| Host Interface(s) | PCI |
| Max Data Distance | 4000 feet |
| Max Data Rate | 921.6K bps |
| Optically Isolated | Yes |
| Operating Temperature | 0°C to 70°C (32°F to 158°F) |
| PC Bracket | Low Profile |
| # of Ports | 1 |
| RoHS Compliant | Yes |
| Serial Connector(s) | DB25M |
| Storage Temperature | -50°C to 105°C (-58°F to 221°F) |
| UART Series | 850 UART |

Compliant with RoHS and WEEE directives
Configurable for RS-232, RS-422, or RS-485
Optical isolation provides protection against transients and ground loops
16C850 buffered UART with 128-byte FIFOs
Data rates to 921.6K bps
MD1 Low Profile and Universal Bus (3.3V and 5V) compatible
Automatic RS-485 enable/disable
DB-25M connector

Copyright 1996 - 2021 - Sealevel Systems, Inc. All rights reserved.