

Features

- Reusable
- Submersible (with temperature only cap)
- Temperature and Humidity Monitoring
- Programmable start time
- User-friendly
- Low cost
- 0 to 60°C temperature range and 0 to 95% humidity
- $\pm 0.5^{\circ}\text{C}$ and $\pm 3.0\% \text{RH}$ accuracy
- 0.1°C and $0.5\% \text{RH}$ resolution

Applications

- Egg shipment
- Egg storage
- Hatcheries


MadgeTech's EGMS is specifically designed to measure and record the temperature and humidity of eggs during shipping, storage and incubation. The logger thermally responds to an environment the same way a real egg does, simulating the temperature and humidity experience of the actual product.



The EGMS comes with a humidity and temperature cap, and a temperature only cap. The temperature and humidity cap is vented to measure humidity, whereas the temperature only cap is not vented making the product submersible.

The EGMS can measure temperatures up to 60°C. It has a user replaceable battery, that typically lasts up to 1 year. The nonvolatile memory can hold up to 32,767 readings and will retain data even if the battery becomes discharged.

MadgeTech's data logger software offers an easy way to analyze data. Data can be viewed in Celsius or Fahrenheit, and in graph, summary or data formats. For further analysis data can also be exported to Excel.

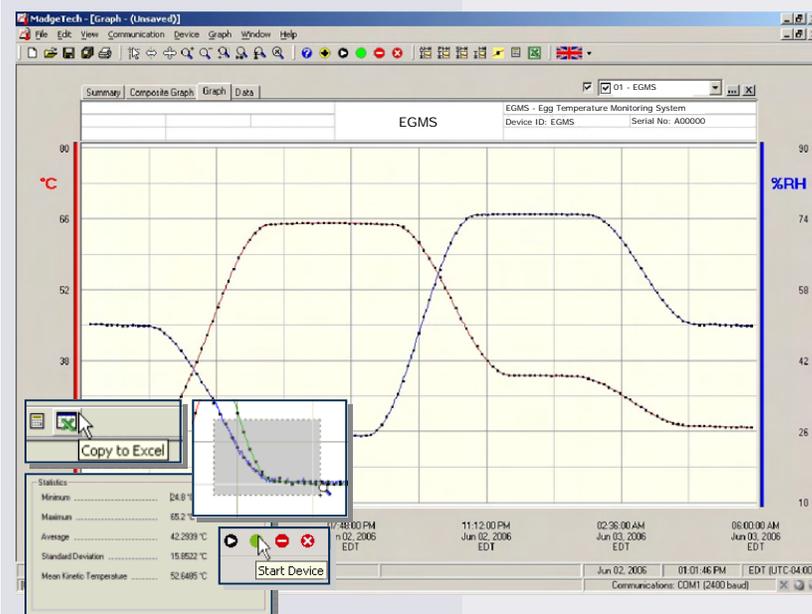

Data Recorder Software

displays temperature data in an easy to use graph.

The Windows®-based software package allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

EGMS SPECIFICATIONS*

Temperature Sensor: Semiconductor	Memory: 16,383 readings per channel; 32,766 total readings
Temperature Range: 0 to +60°C	Reading Rate: 1 reading every 2 seconds to 1 every 12 hours
Temperature Resolution: 0.1°C	Time Accuracy: ±1 minute/month @ 20°C
Calibrated Accuracy: ±0.5°C	Data Format: Date and time stamped °C, °F, K, °R; %RH, mg/ml water vapor concentration
Humidity Sensor: Semiconductor	Battery Type: 2 - 1.55V SR1154W batteries included, user replaceable
Humidity Range: 0 to 95%RH	Battery Life: 1 year typical (15 minute reading rate, 25 °C)
Humidity Resolution: 0.5%RH	Activity Indicator: Green LED blinks every 15 seconds to indicate device has been started
Calibrated Accuracy: ±3.0%RH (±2.0%RH typical @ 25°C)	Temperature Alarm: Programmable temperature alarm with high and low limits selectable in software; when logged data reaches or exceeds either limit, the red LED blinks every three seconds
Specified Accuracy Range: +10 to +40°C, 10 to 80%RH	Computer Interface: PC serial or USB (interface cable required) 38,400 baud
Response Time: 90% change in 60 seconds in slow moving air	Software: Windows 95/98/ME/NT/2000/XP/Vista based software
Calibration: Digital calibration through software	Operating Environment: 0 to +60°C, 0 to 95%RH non-condensing Product is submersible with temperature cap
Start Modes: Software programmable immediate start or delay start up to six months in advance	Dimensions: 2.25" X 1.68" dia. (57.15mm x 42.67mm dia.)
Real Time Recording: May be used with PC to monitor and record data in real time	Weight: 2.02 oz (60 g)
	Material: Enclosure: HDPE Logger: 303 Stainless Steel
	Approvals: CE

BATTERY WARNING: DO NOT DISPOSE OF IN FIRE OR RECHARGE—MAY EXPLODE OR LEAK AND CAUSE PERSONAL INJURY.

SOFTWARE FEATURES

Multiple Graphs: Simultaneously analyze data from several units or deployments; easily switch to a single data series	Statistics: Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button
Real-Time Recording: Collect and display data in real-time while continuing to log	Export Data: Export data in a variety of common formats, or switch to Excel® with a single click
Graphical Cursor: One click displays readings by time, value, parameter or sample number	Calibration: Automatically calculate and store calibration parameters
Data Table: Instantly access tabular view for detailed dates, times, values, and annotations	Logger Configuration: Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
Scaling Options: Autoscale function fits data to the screen, or allows user to manually enter their own values	Communications: Automatically sets up communications port, or lets user select configuration
Formatting Options: Change colors, line styles, plotting options, show or hide channels quickly	Printing: Automatically print graphical or tabular data

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY.

ORDERING INFORMATION

<u>Model</u>	<u>Description</u>
EGMS	EGMS, egg temperature and humidity monitoring system
IFC102	Software, manual and RS232 interface cable
IFC202	Software, manual and USB interface cable
NIST	N.I.S.T. Calibration Certificate
SR1154	Replacement battery for the EGMS

ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	Pulse/Event/State
Humidity	Low Level Current
Pressure	Low Level Voltage
pH	RF Transmitters
Level	Intrinsically Safe
Shock	Spectral Vibration
LCD Display	

info@logicbus.com.mx

www.logicbus.com.mx

Alcalde #1822 Col. Miraflores C.P. 44270 Guadalajara, Jal. Mexico
 MX 01 (33) 3854-5975 y 3823-4349 USA 001 (858)-869-5401 (Chula Vista, CA. Office)