
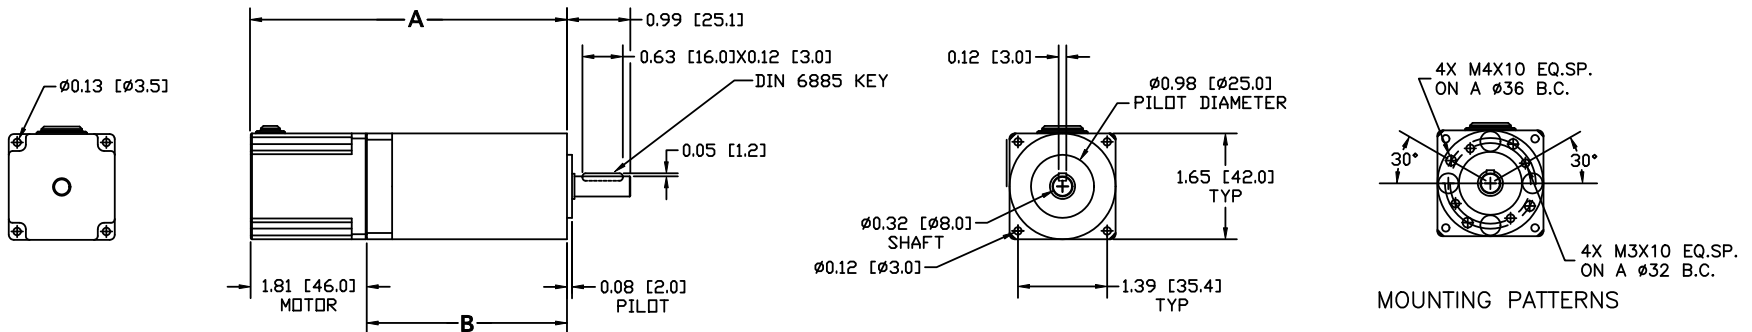


TABULATION CHART				
MODEL NUMBER	DESCRIPTION	RATIO	DIMENSION A	DIMENSION B
BL030-H03-GP003	BLO30 MOTOR WITH 1 STAGE PG GEARHEAD	3.70:1	112.25 (4.41)	66.25 (2.60)
BL030-H03-GP004	BLO30 MOTOR WITH 1 STAGE PG GEARHEAD	4.28:1		
BL030-H03-GP005	BLO30 MOTOR WITH 1 STAGE PG GEARHEAD	5.18:1		
BL030-H03-GP007	BLO30 MOTOR WITH 1 STAGE PG GEARHEAD	6.75:1		
BL030-H03-GP014	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	13.73:1	125.3 (4.93)	79.3 (3.12)
BL030-H03-GP016	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	15.88:1		
BL030-H03-GP018	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	18.36:1		
BL030-H03-GP019	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	19.20:1		
BL030-H03-GP022	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	22.20:1		
BL030-H03-GP025	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	25.01:1		
BL030-H03-GP027	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	26.85:1		
BL030-H03-GP029	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	28.93:1		
BL030-H03-GP035	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	34.97:1		
BL030-H03-GP046	BLO30 MOTOR WITH 2 STAGE PG GEARHEAD	45.56:1		
BL030-H03-GP051	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	50.89:1	138.45 (5.45)	92.45 (3.63)
BL030-H03-GP059	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	58.85:1		
BL030-H03-GP068	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	68.06:1		
BL030-H03-GP071	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	71.16:1		
BL030-H03-GP079	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	78.71:1		
BL030-H03-GP093	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	92.70:1		
BL030-H03-GP095	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	95.17:1		
BL030-H03-GP100	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	99.50:1		
BL030-H03-GP107	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	107.20:1		
BL030-H03-GP115	BLO30 MOTOR WITH 3 STAGE PG GEARHEAD	115.07:1		

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE – ECO 6645	2/4/13	J Kordik
B	REVISED – ECO 6692	2/6/13	



NOTE: UNLESS OTHERWISE SPECIFIED

- FOR TECHNICAL DETAILS, CONTACT APPLIED MOTION PRODUCTS.
- FOR IGS 3D MODEL, VISIT OUR WEBSITE, [WWW.APPLIED-MOTION.COM](http://WWW.APPLIED-MOTION.COM)

TOLERANCES		THIRD ANGLE PROJECTION		APPLIED MOTION PRODUCTS, INC.	
DECIMALS: [MM] INCH X.XXX = $\pm$ .005 X.XX = $\pm$ [0.13].010 X.X = $\pm$ [0.25].020				<b>BL030 MOTOR WITH PG GEARHEAD TABULATION CHART</b>	
ANGLES: MACH. = $\pm 5^\circ$ CHAM. = $\pm 5^\circ$		APPROVALS	DATE		
COMPUTER DATA BASF DRAWING		DRAWN <i>R. JONEZ</i>	11/15/12	B	DWG NO. <b>BL030-H03-GPXXX</b>
		CHECKED		REV B	
		APPROVED		SCALE: NONE	SHEET 1 OF 1