

TPC-PRS156W

15.6" Intel 8th Gen. CPU Resistive Industrial Panel PC

Version: 3.0



Features


- Widescreen 15.6" TFT LCD display, LED Backlit, WXGA 1366 * 768;
- Intel 8th -gen. Whiskey Lake Celeron, Core i3/i5/i7 processor;
- Single DDR4 memory, up to 16GB, 1* M.2 storage;
- High temp. 5-wires precision resistive touchscreen, EETI controller;
- Aluminum-magnesium alloy, anodized treatment, Modular designed;
- 2 GLAN, Dual wireless expansion, 4G/5G, WIFI/BT support;
- 4*USB3.0, 2*USB2.0, 6*COM (Optional GPIO), 2*HDMI;
- DC 12V, optional wide voltage DC 9~36V input;
- Fan-less & Rich IOs design, Panel mount, Front IP65 protection.

Specification

Hardware & System	BIOS	SPI AMI EEI BIOS
	CPU	Intel 8 th -gen. Whiskey Lake Celeron 4205U, Core i3-8145U, Core i5-8265U, Core i7-8565U
	Memory	SO-DIMM, DDR4-1866/2133/2400 MT/s, Max. up to 16GB
	Storage	1* M.2 2242/2280 (Optional support 1* 2.5" SATA)
	Graphic	Intel UHD Graphics 610/620
	Network	1* Intel I211AT, 1* Intel I219V (Optional 3G/4G, 5G, Wi-Fi/BT, Wi-Fi 6)
	TPM	Intel PTT TPM2.0
	Expansion	1* M.2 Key-B slot, 1* M.2 Key-E slot
	Watch dog	0~256 seconds programmable
	OS	Win10/Win 11, Linux
IO interface	COM	COM1/6: RS485(Optional RS232), COM2/3/4: RS232, COM5: RS232 (Optional 8 GPIO)
	Ethernet	2* RJ45, 10/100/1000 Mbps
	Audio	Default no Mic-in/Line-out (Optional)
	USB	4x USB3.0, 2x USB2.0
	Display	2x HDMI (Max. support 4096*2160 @30Hz)
	Power	1x 2 pins, phenix terminal
LCD Display	Size/Type	15.6" TFT LCD
	Resolution	1366 * 768 (WXGA)
	Brightness	500 nits
	Backlit & MTBF	LED backlit & 50 000hours
	Display area	344.23 * 193.54
	View angle	80/80/80/80
Touchscreen	Type	High temp. 5-wires Resistive touchscreen
	Response time	<5ms
	Click life	250g / 35 million times
	Special treatment	PET film laminated, flat design
	Touch controller	EETI
Structure	Structure and surface	Magnesium-Aluminum alloy, sand blasting, anodized treatment
	Mount method	Panel mount (Optional support VESA 75/100 mount with bracket)
	Cooling system	Large area finned heat sink
	Overall dimension	395.6 * 247.9 * 84.0 (mm)
	Cut-out dimension	385 * 237 (mm)
	Net weight	5.0 KG
	IP protection	Front Panel IP65
Power & Environmental	Operating temp.	-10 ~ +60°C
	Storage temp.	-20 ~ +70°C
	Relative Humidity	10 ~ 95% @ 10C (Non-condensation)
	Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak
	Shock	10G/Peak (11 ms)
	Power input	DC 12V (Optional DC 9~36V)
	Power consumption	Around 40W
	EMC	CE/FCC Class A

DIMENSIONAL DRAWING:TPC-PRS156A/W

Dimension

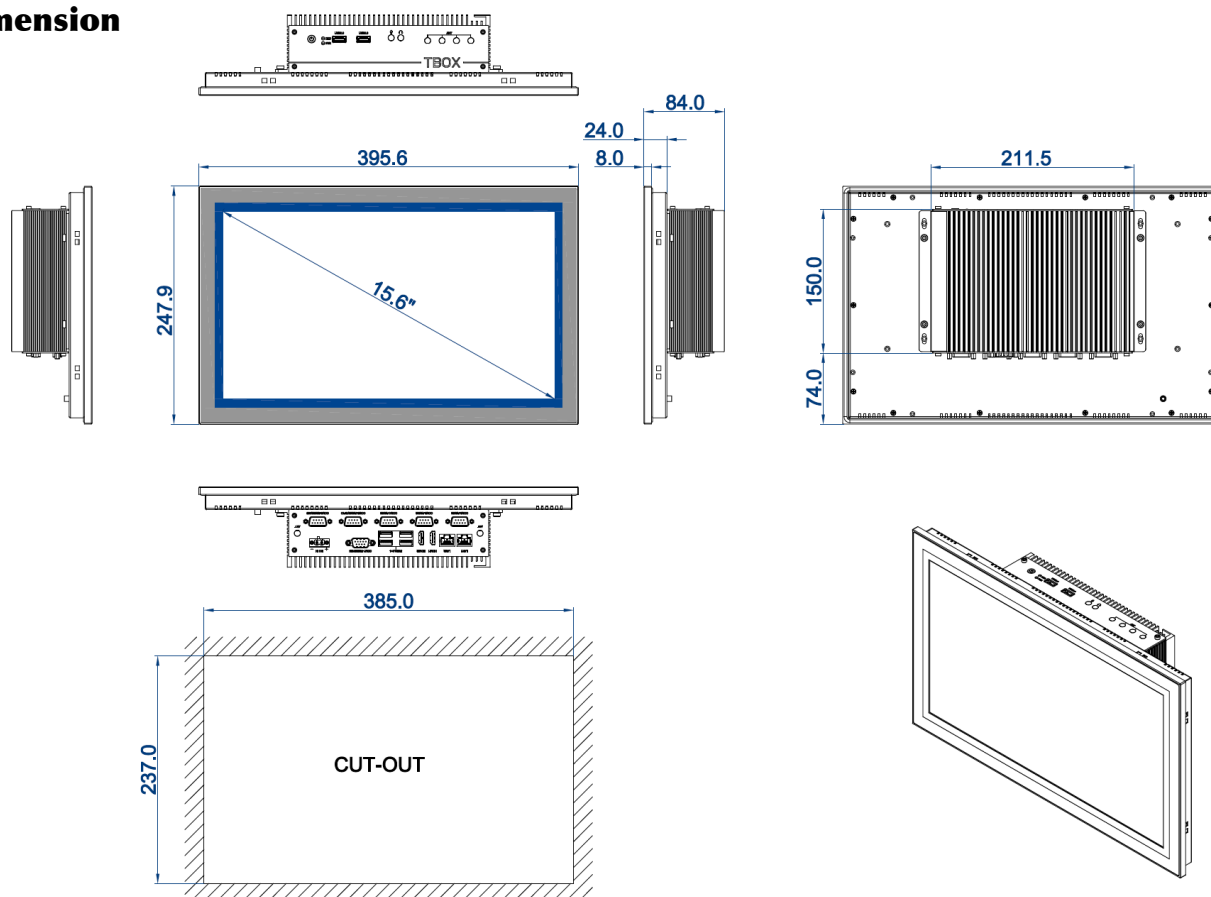

DIMENSIONS IN MILLIMETERS

TAICEM
 DATE:2021.12.16
 REV:A Unit:mm

Ordering info.

Part no.	Description
TPC-PRS156W0	15.6", 1366 * 768, Celeron 4205U , Dual-core 1.8Ghz , Resistive touch, 2*GLAN, 6*USB, 6*COM, 2*HDMI, DC 12V
TPC-PRS156W1	15.6", 1366 * 768, Core i3-8145U , Dual-core 2.1Ghz , Resistive touch, 2*GLAN, 6*USB, 6*COM, 2*HDMI, DC 12V
TPC-PRS156W2	15.6", 1366 * 768, Core i5-8265U , Quad-core 1.6Ghz , Resistive touch, 2*GLAN, 6*USB, 6*COM, 2*HDMI, DC 12V
TPC-PRS156W3	15.6", 1366 * 768, Core i7-8565U , Quad-core 1.8Ghz , Resistive touch, 2*GLAN, 6*USB, 6*COM, 2*HDMI, DC 12V
Memory	SO-DIMM, DDR4, <u>4GB/8GB/16GB</u> Memory
Storage	M.2 SSD: <u>128GB/256GB/512GB</u> 2.5" SATA SSD: <u>128GB/256GB/512GB</u> 2.5" HDD: <u>2TB/4TB</u>
Wireless modules	Wi-Fi module, with Antenna (M.2 interface) Wi-Fi with BT integrated module, with Antenna (M.2 interface) All network 4G/LTE module, With Antenna (M.2 interface) 5G network module, with Antenna (M.2 interface)
DC module	DC to DC, wide voltage DC 9~36V
SIM Card module	SIM Card slot for 3G/4G/5G Wireless function
Bracket	Additional VESA bracket for VESA mounting

Packing List

- 1x Standard Product
- 1x PSU (Power Supply)
- 1x Power cable & Plug
- 8x Panel mount metal clips