Logicbus
Your Automation Site !

LBABO-B540301

Features

- Two built in fixing methods: Metallic bracket panel mounting; Busbar suppout mounting
- Built in hinged terminal cover
- Built in transparent cover for name plate
- Accuracy (0.5S, 0.5)
- Primary current from 5A to 1000A

Specifications

Rated Frequency	50/60Hz
Rated test voltage	3kV AC. (1min)
Rated short-time thermal current	60In
Rated dynamic current	2.5Ith
Rated voltage	0.72Kv AC
Continuous overload	1.2In
Operating temperature	-10°C to 50°C
Housing self-extinguishing class	VO
Safety factor	FS 5
Secondary current	5A
Standard	IEC60044-1, EN60044-1, VDE0414-44-1, GB1208-2006

Ratio (A)	Burden(VA)		Item Code
	Class: 0.5S	Class: 0.5	
5/5	5	5	LBABO-B54030100055
10/5	5	5	LBABO-B54030100105
15/5	5	5	LBABO-B54030100155
20/5	5	5	LBABO-B54030100205
30/5	5	5	LBABO-B54030100305
40/5	5	5	LBABO-B54030100405
50/5	5	5	LBABO-B54030100505
60/5	5	5	LBABO-B54030100605
75/5	5	5	LBABO-B54030100755
80/5	5	5	LBABO-B54030100805
100/5	5	5	LBABO-B54030101005
150/5	5	5	LBABO-B54030101505
200/5	5	5	LBABO-B54030102005
250/5	5	5	LBABO-B54030102505
300/5	5	5	LBABO-B54030103005
400/6	5	5	LBABO-B54030104005
500/5	5	10	LBABO-B54030105005
600/5	5	10	LBABO-B54030106005
800/5	5	10	LBABO-B54030108005
1000/5	5	10	LBABO-B54030110005
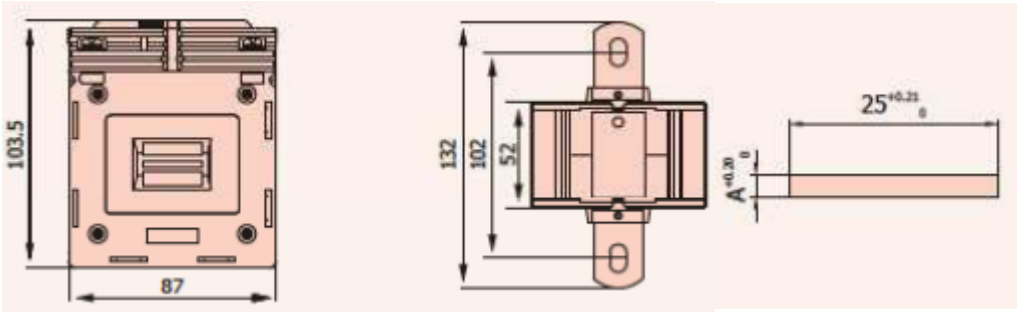
Dimensions (mm)