



LBUK-544030400

Features

- Busbar mounting
- Side hinge design
- Primary current from 100A to 800A

Specifications

Rated Frequency	50/60Hz
Rated test voltage	3kV AC. (1min)
Rated short-time thermal current	60In
Rated dynamic current	2.5Ith
Rated voltage	0.72Kv AC
Continuous overload	1.2In
Operating temperature	-10°C to 50°C
Housing self-extinguishing class	VO
Safety factor	FS 5
Secondary current	5A

Ratio (A)	Burden(VA)		Item Code
	Class: 0.5	Class: 1.0	
100/5	-	1	LBUK-5440304001005
150/5	1	1.5	LBUK-5440304001505
200/5	1.5	2.5	LBUK-5440304002005
250/5	1.5	2.5	LBUK-5440304002505
300/5	1.5	2.5	LBUK-5440304003005
400/5	2.5	5	LBUK-5440304004005
500/5	2.5	5	LBUK-5440304005005
600/5	2.5	5	LBUK-5440304006005
800/5	2.5	5	LBUK-5440304008005



PLCs



Acquisition



Instruments



Data logger



Power



HMI



Switches



Motion




Sensors



Converters



Keyboards




SCADA



Telemetry

Dimensions (mm)

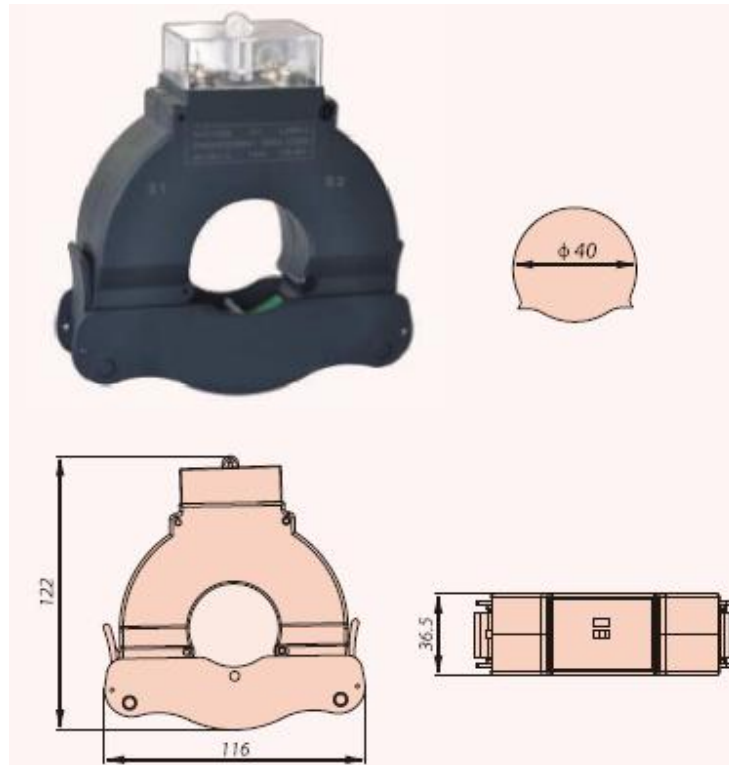

PLCs



Acquisition



Instruments



Data logger



Power



HMIs



Switches



Motion




Sensors



Converters



Keyboards



SCADA



Telemetry